


General data

Performance range

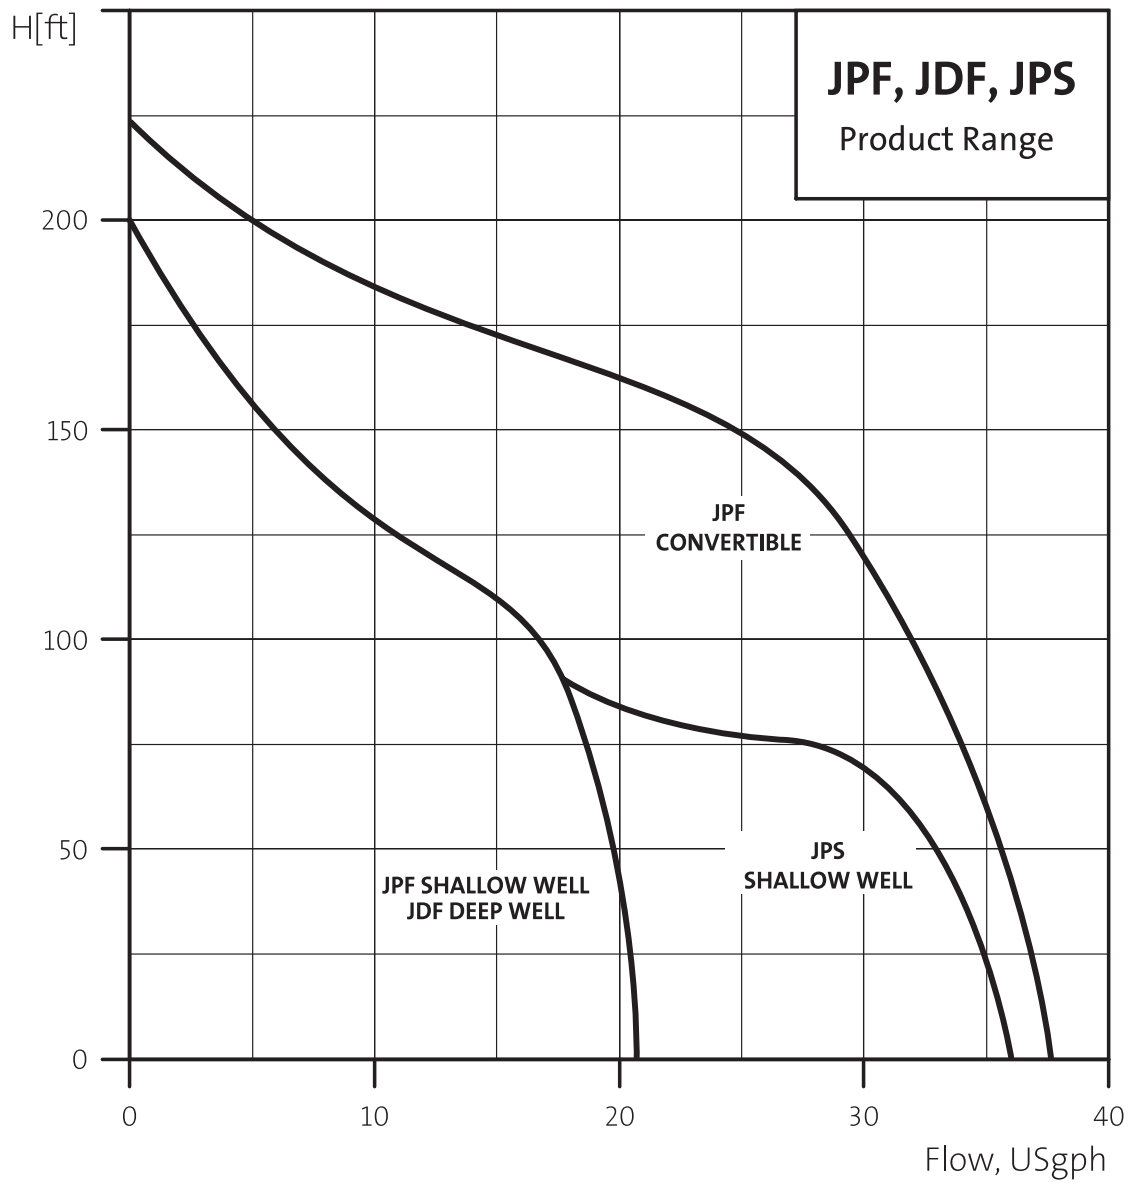

General data

Product range

Model	JPF 2-A	JPF 3-A	JPF 4-A	JPF 41-A	JPF 5-A	JPF 7-A	JPS 2-A	JPS 4-A	JDF 2-A	JDF 4
Flow range (gpm)	0-13	0-12.5	0-16	0-21	0-22	0-35	0-17	0-29	0-10	0-14
Max. pump head H(ft)	135	170	172	185	200	200	140	155	145	167
Max. working pressure (psi)	87	87	87	87	110	110	110	110	87	87
Motor power (hp), Nominal	1/3	1/2	3/4	1	1.5	2	1/2	1	1/2	3/4
Maximum Fluid Temperature range	14°F to 104°F (-10 to 40°C)									
Maximum lift, Ft	26	26	26	26			26	26		
Maximum Ambient Temp	34°F to 104°F (1 to 40°C)									
Factory Pressure -Switch setting (PSI)	20-40	30-50	30-50	50-70	50-70	50-70	30-50	30-50	30-50	30-50
Storage Temp	14°F to 104°F (-10 to 40°C)									
Relative Humidity	95%									
Maximum Starts per hour	20									

General data

Applications

Shallow well, Deep well and Convertible pump applications. Grundfos jet pumps are self-priming centrifugal pumps suitable for domestic water supply systems, light agricultural and industrial water transfer applications

Pumps

JPF2A, JPF3A, JPF4A, JPF41A Pumps:

Rugged cast iron construction, single-stage shallow well centrifugal pumps. End suction, top discharge arrangement and Technopolymer impeller. Pump has built-in ejector complete with clean out port to clear blockages from nozzle. Convenient priming plug for ease of priming and air elimination. Ceramic-Carbon bellows mechanical seal ensures trouble-free operation.

JPF5A & JPF7A Pumps:

Rugged cast iron construction, multistage convertible centrifugal pumps. End suction, top discharge arrangement with detachable ejector assembly for deep well applications and Technopolymer impellers. Pump complete with clean out port to clear blockages from nozzle. Convenient priming plug for ease of priming and air elimination. Ceramic-Carbon bellows mechanical seal ensures trouble-free operation.

JDF2A & JDF4A Pumps:

Rugged cast iron construction, single-stage deep well centrifugal pumps. End suction, top discharge arrangement and Technopolymer impeller. Pump has separate deep well port for connection to Deep Well ejector kit. Convenient priming plug for ease of priming and air elimination. Ceramic-Carbon bellows mechanical seal ensures trouble-free operation.

JPS2A & JPS4A Pumps:

Corrosion resistant stainless steel construction, single stage shallow well centrifugal pumps. End suction, top discharge arrangement and Technopolymer impeller. Ceramic-Carbon bellows mechanical seal ensures trouble-free operation.

Motors

All jet pump motors are totally enclosed and fan-cooled design for quiet operation and superior protection in harsh environments. Stainless steel motor shaft offers excellent corrosion resistance. Double, oversized greased ball bearings are maintenance-free sealed for life. All motors have built-in thermal overload protection and are capacitor-run, with no switches to fail. Drive end motor bearing protected by durable lip seal. Motor insulation class F. NEMA 3R enclosure rating on motor terminal box.

Pumped Liquid


Only use on clean, non-viscous, non-aggressive, non-explosive liquids. Pump not to be used on pool water applications or hydrocarbon transfer (i.e. diesel, gasoline, etc).

Agency Approvals:

CSA -Std C22.2 No 108, No 77-95.

Mounting Position:

Shaft in horizontal position only for all pumps.

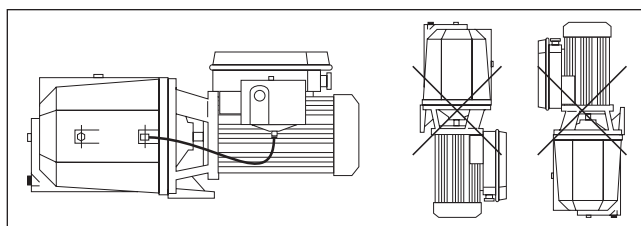


General data

Electrical Data:

Model	Electrical Data					
	Voltage 60 Hz	kW Maximum	hp Nominal	S.F.	I Amps	Capacitor μF
JPF2A	115	0.44	1/3	1.8	6	40
JPF2A	230	0.44	1/3	1.8	3	10
JPF3A	115	0.59	1/2	1.6	7.5	20
JPF3A	230	0.59	1/2	1.6	3.8	12.5
JPF4A	115	0.75	3/4	1.3	10	64
JPF4A	230	0.75	3/4	1.3	5	16
JPF41A	115	1.31	1	1.4	12	80
JPF41A	230	1.31	1	1.4	A	20
JPF5A	230	1.1	1.5	1.5	8	31.5
JPF7A	230	1.85	2	1.3	11	40
JPS2A	115	0.88	1/2	1.6	7.6	50
JPS2A	230	0.82	1/2	1.6	3.7	12.5
JPS4A	115	1.6	1	2.0	13.6	80
JPS4A	230	1.53	1	2.0	7	20
JDF2A	115	0.6	1/2	1.6	7	50
JDF 2A	230	0.6	1/2	1.6	3.4	12.5
JDF4A	115	0.75	3/4	1.3	8	64
FDF 4A	230	0.75	3/4	1.3	4	16

General data

JPF 2A, 3A, 4A, 41A Shallow Well


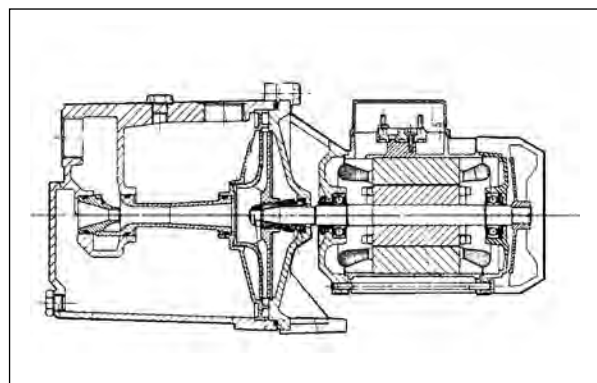


Materials: JPF 2A, 3A, 4A, 41A Shallow Well

Descriptions	Material
Motor Stool	Cast Iron
Shaft Seal	Carbon/Ceramic/NBR
O-Rings & Gaskets	NBR
Base Plate	Cast Iron
Pump Housing	Cast Iron
Impeller	Technopolymer
Tubing	Polyethylene
Seal plate	Noryl®
Ejector/Guide Vane	Noryl®

Note: Noryl® is a registered trademark of General Electric Company

JPF 5A, 7A Convertible

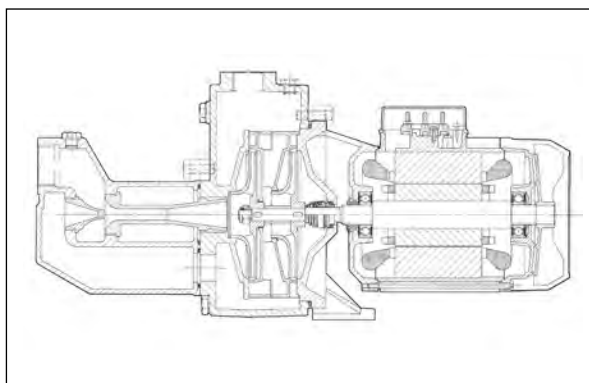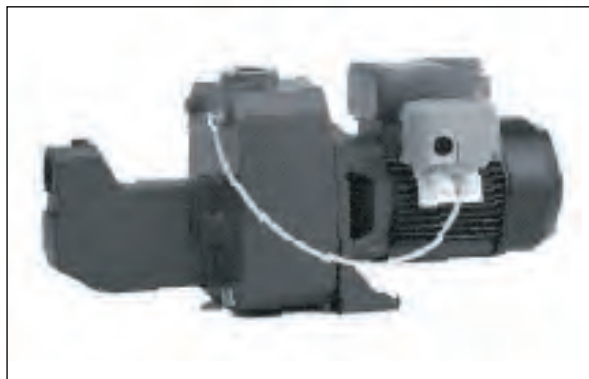


Materials: JPF 5A, 7A Convertible

Descriptions	Material
Motor Stool	Cast Iron
Shaft Seal	Carbon/Ceramic/NBR
Motor Shaft	Stainless Steel
O-Rings & Gaskets	NBR
Base Plate	Cast Iron
Pump housing	Cast Iron
Impellers	Technopolymer
Tubing	Polyethylene
Seal plate	Noryl®
Ejector/Guide Vane	Noryl®

Note: Noryl® is a registered trademark of General Electric Company

General data



JPS 2A, 4A

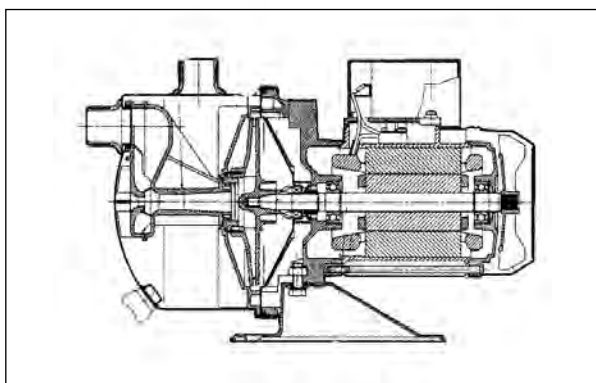

Materials: JPS 2A, 4A

Descriptions	Material
Motor Stool	Cast Iron
Shaft Seal	Carbon/Ceramic/NBR
O-Rings & Gaskets	NBR
Base Plate	Steel
Pump housing	Stainless Steel AISI 304
Impeller	Technopolymer A
Tubing	Polyethylene
Seal plate	Stainless Steel AISI 304
Ejector/Guide Vane	Technopolymer A

JDF 2A, 4A

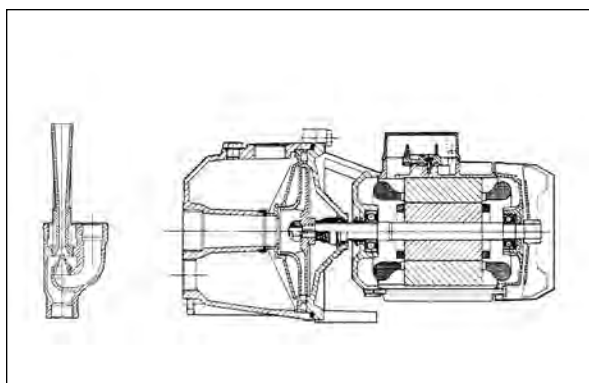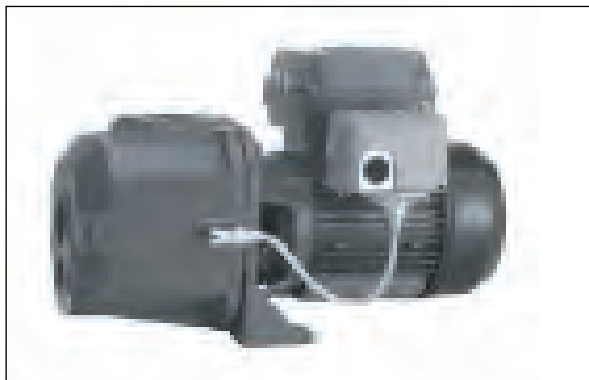

Materials: JDF 2A, 4A

Descriptions	Material
Motor Stool	Cast Iron
Shaft Seal	Ceramic/Ceramic/NBR
O-Rings & Gaskets	NBR
Base Plate	Cast Iron
Pump housing	Cast Iron
Impeller	Technopolymer
Tubing	Polyethylene
Seal plate	Noryl©

Note: Noryl© is a registered trademark of General Electric Company

General data

JPF Pump package* Cast Iron



*Only available in Canada

JPS Pump package* Stainless Steel



*Only available in Canada

Features and Benefits

Assembled jet-pump and tank package. Available with rugged cast iron pump or corrosion-resistant stainless steel pump mounted on a stainless steel, 6 gallon (24 Litre) diaphragm tank. Package comes complete with pressure switch, gauge, hose and fittings, ready to go.

Materials: JPF Pump Package


Descriptions	Material
Motor Stool	Cast Iron
Shaft Seal	Carbon/Ceramic/NBR
O-Rings and Gaskets	NBR
Base Plate	Cast Iron
Pump Housing	Cast Iron
Impeller	Technopolymer
Tubing	Polyethylene
Seal Plate	Noryl®
Ejector/Guide Vane	Noryl®
Tank	Stainless Steel AISI304

Materials: JPS Pump Package

Descriptions	Material
Motor Stool	Cast Iron
Shaft Seal	Carbon/Ceramic/NBR
O-Rings and Gaskets	NBR
Base Plate	Steel
Pump Housing	Stainless Steel AISI304
Impeller	Technopolymer A
Tubing	Polyethylene
Seal Plate	Stainless Steel AISI304
Ejector/Guide Vane	Technopolymer A
Tank	Stainless Steel AISI304

Note: Noryl® is a registered trademark of General Electric Company

Dimensional Drawings

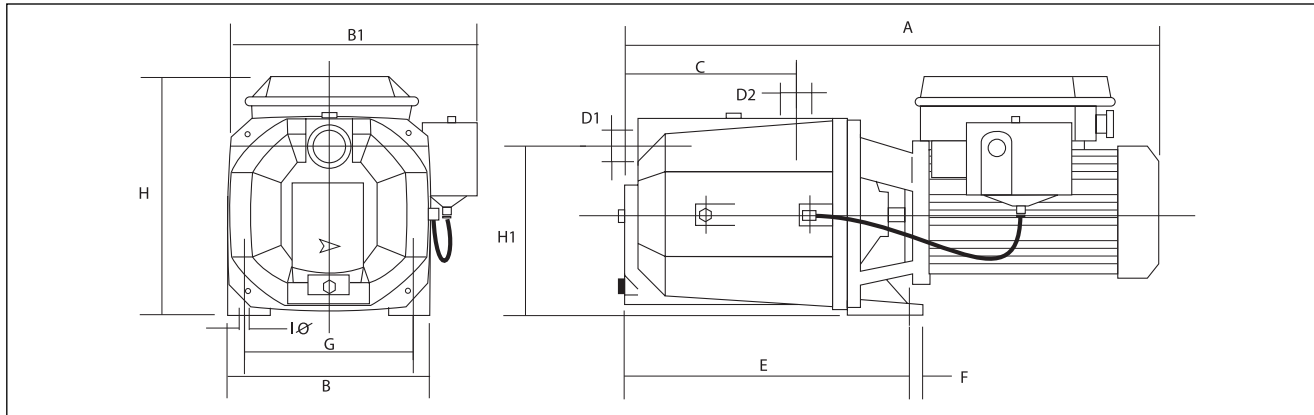





Dimensions and Weights

Pump Type	Motor Data				D1 Suction NPT	D2 Disch. NPT	Dimensions (inches)										Ship Wt. (lbs)	Ship Vol. (Cu Ft.)
	HP	S.F.	PH	Volts			A	B	B1	C	E	F	G	H	H1	IØ		
JPF2A	1/3	1.8	1	115 or 230	1"	1"	16.2	7.1	9.1	5.5	8.9	0.6	5.5	8.9	6.0	0.38	35	1.5
JPF3A	1/2	1.6	1	115 or 230	1"	1"	16.2	7.1	9.1	5.5	8.9	0.6	5.5	8.5	6.0	0.38	36	1.5
JPF4A	3/4	1.3	1	115 or 230	1"	1"	17.3	7.1	9.1	5.5	9.2	0.6	5.5	8.9	6.0	0.38	41	1.5
JPF41A	1	1.4	1	115 or 230	1"	1"	17.3	7.1	9.1	5.5	9.2	0.6	5.5	8.9	6.0	0.38	43	1.5


Shallow Well Performance Chart

Model	HP	Depth to Water	Discharge Pressure (PSI)							Shut-off (PSI)	Pressure Switch Settings (PSI)
			20	30	35	40	45	50	55		
			Capacities (GPM)*								
JPF2A	1/3	5	11	7	6	4	3	2		58	20-40
		10	10	7	6	4	3	2		56.5	
		15	9	7	6	4	3	2		54	
		20	7	6	5	4	3	2		51.5	
		25	5	4	3	2	1			49	
JPF3A	1/2	5	12	11	11	10	7	6	4	73.5	30-50
		10	10.5	10	10	9.5	7	6	4	71	
		15	9	8.5	8	8	7	6	4	68.5	
		20	7.5	7	7	7	6.5	6	4	66	
		25	5	5	5	5	4.5	4	4	63.5	
JPF4A	3/4	5	15	14	14	13	10	8.5	6	75.5	30-50
		10	13	12.5	12.5	12	10	8.5	6	73	
		15	11	11	10	10	10	8	6	70.5	
		20	9	9	9	8.5	8	7	6	68	
		25	6	6	6	6	5	5	5	65.5	
JPF41A	1	5	21	20.5	20	20	20	19	17.5	86.5	50-70
		10	19	18.5	18	18	17.5	17.5	17	84	
		15	16	16	16	15.5	15	15	14.5	81.5	
		20	13.5	13.5	13.5	13	13	12.5	12	79	
		25	10	10	10	9.5	9	9	8.5	76.5	

Shallow Well Performance Curves

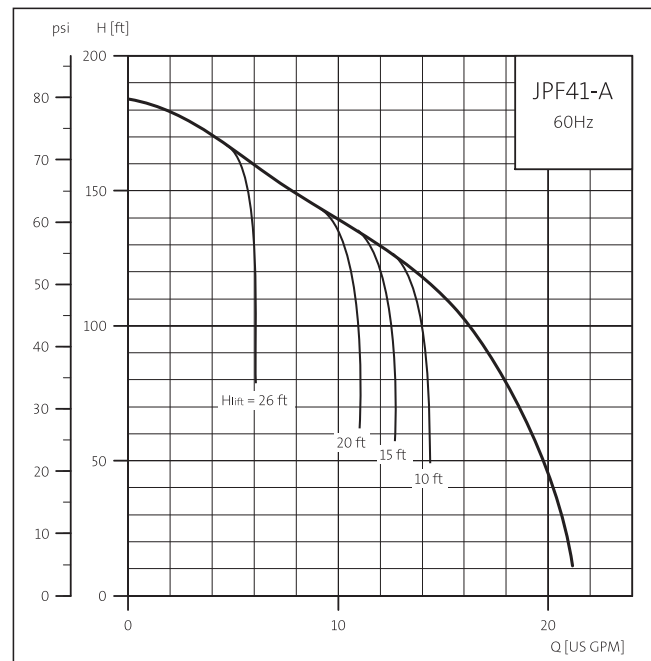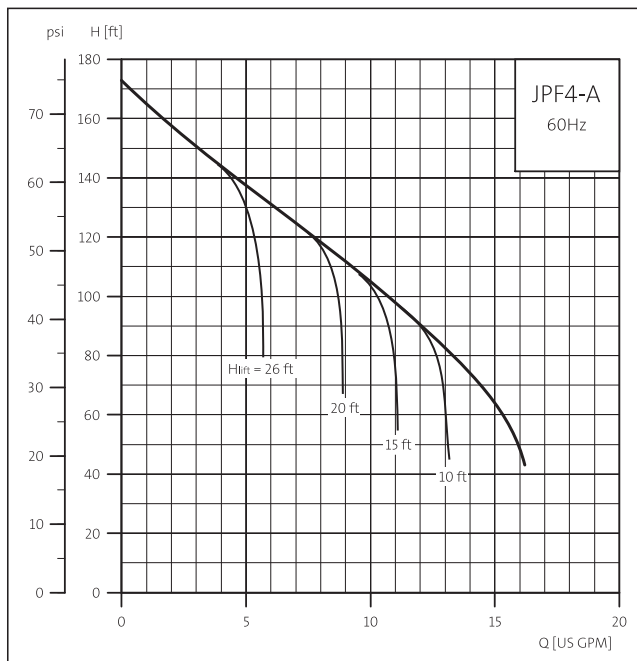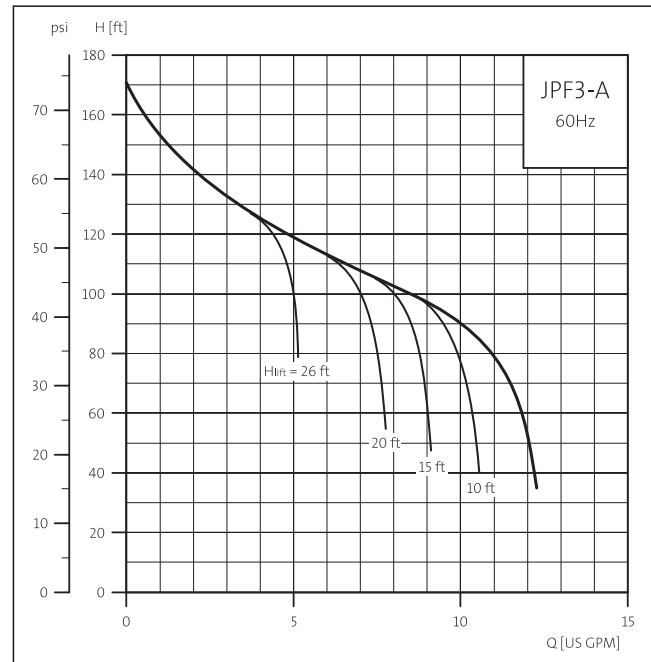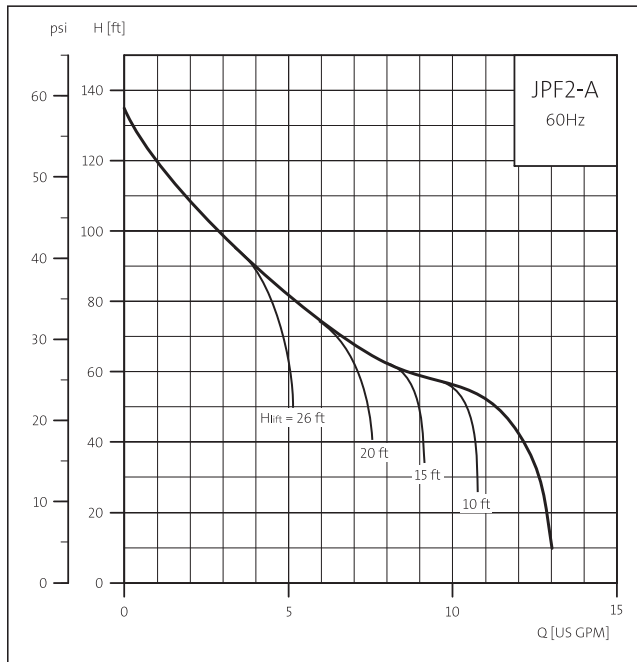

Dimensional Drawings

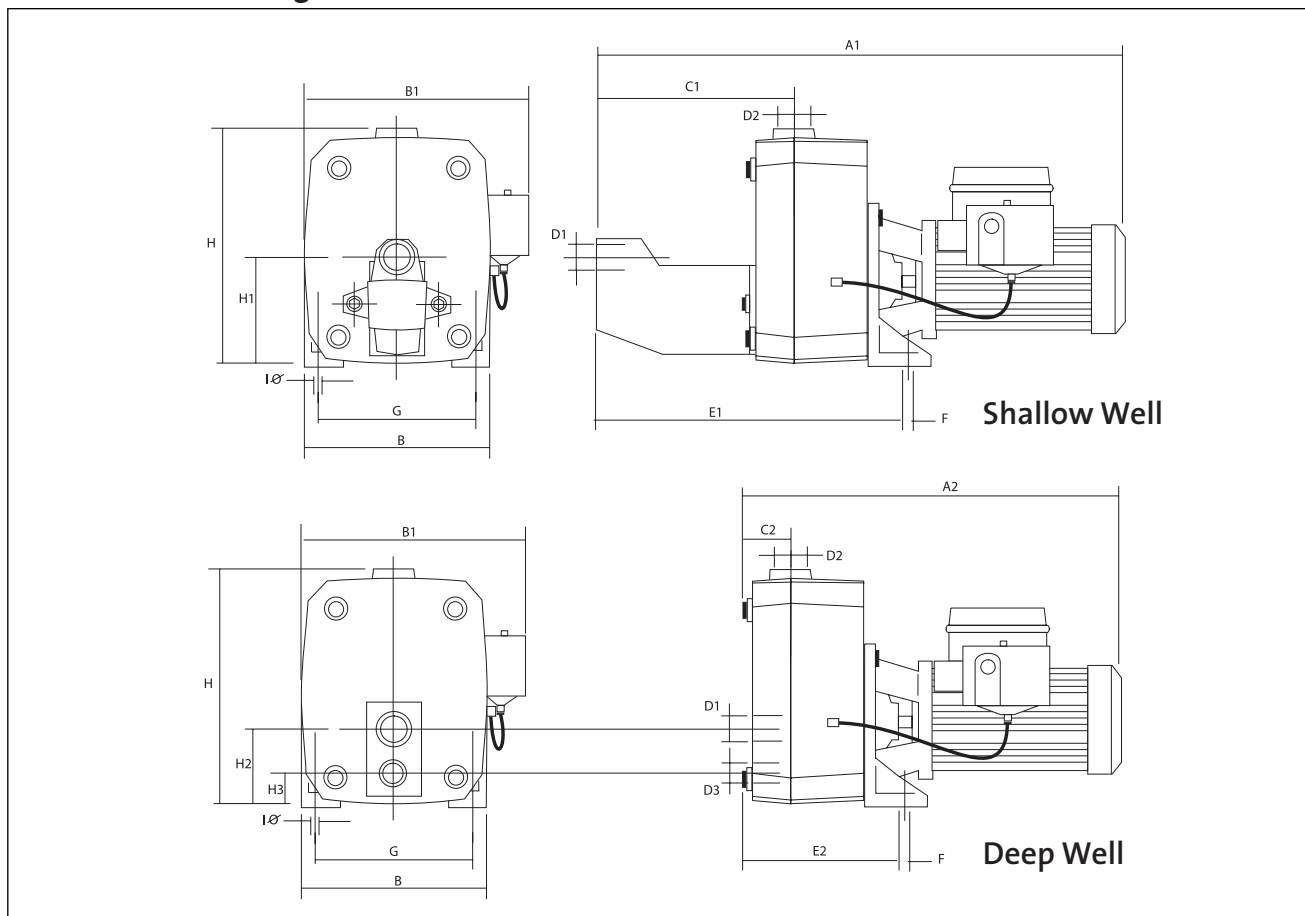


Dimensions and Weights

Pump Type	Motor Data				D1 Suction NPT	D2 Disch. NPT	D3 Re-turn NPT	Dimensions (inches)														Ship Wt. (lbs)	Ship Vol. (Cu Ft.)	
	HP	S.F.	PH	Volts				A1	A2	B	B1	C1	C2	E1	E2	F	G	H	H1	H2	H3			Ø
JPF5A	1.5	1.5	1	230	1-1/4"	1"	1"	22.0	15.3	8.3	11.0	8.7	2.0	13.8	7.8	0.78	5.7	10.0	6.2	4.3	2.1	0.44	70	1.9
JPF7A	2	1.3	1	230	1-1/4"	1"	1"	25.6	19.9	8.3	12.4	8.7	2.0	13.8	7.8	0.78	5.7	10.0	6.2	4.3	2.1	0.44	73	2.5

Conversion Instructions from Shallow Well to DeepWell



Remove bolts and detach ejector nose from convertible jet pump. Connect suction (D1) and pressure (D3) port to deep well ejector.

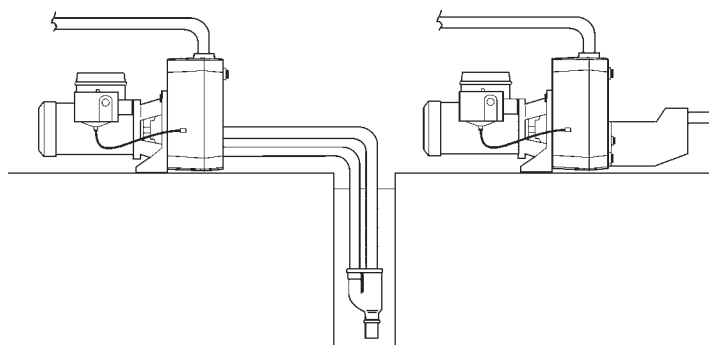

Shallow Well Performance Chart

Model	HP	Depth to Water	Discharge Pressure (PSI)							Shut-off (PSI)	Pressure Switch Settings (PSI)
			20	30	35	40	45	50	55		
			Capacities (GPM)*								
JPF5A	1-1/2	5	21	20.5	20	20	20	19	17.5	86.5	50-70
		10	19	18.5	18	18	17.5	17.5	17	84	
		15	16	16	16	15.5	15	15	14.5	81.5	
		20	13.5	13.5	13.5	13	13	12.5	12	79	
		25		10	10	9.5	9	9	8.5	76.5	
JPF7A	2	5	34	34	33.5	33	32.5	30	27	88	50-70
		10	28.5	28	28	28	27.5	27	26	85.7	
		15	24	24	23.5	23.5	23	22.5	22	83	
		20	20	20	19.5	19.5	19.5	19	19	80	
		25		15.5	15.5	15.5	15	15	15	77.8	


Performance Curves

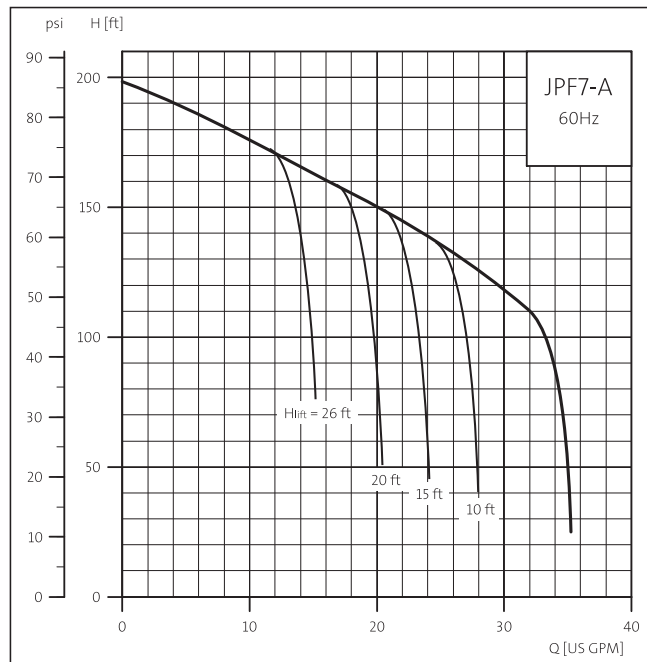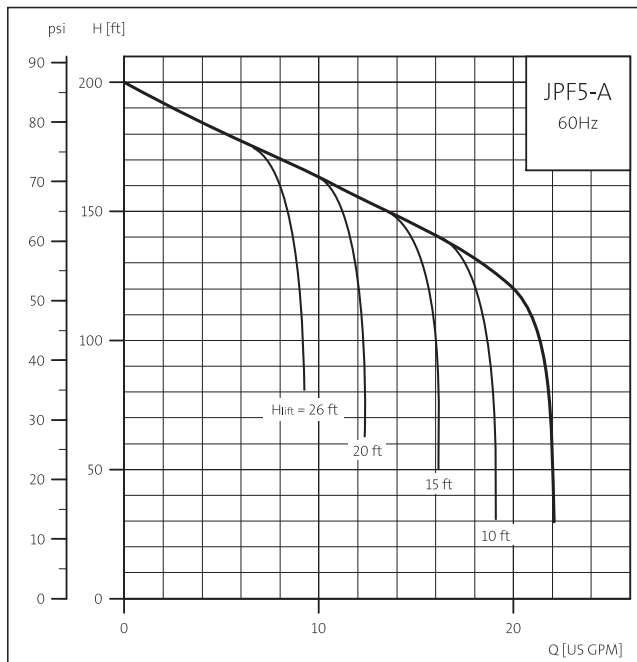

Deep Well Performance Chart

Model	Ejector Type	Discharge Pressure (psig)	Depth to water (feet)									
			30	40	50	60	70	80	90	100	120	140
			Capacities USgph*									
JPF5A	E20	45	896	794	682	586						
		50	727	615	505	404						
		60	575	438	320	220						
		65	365	247	130							
		75	177	63								
	E25	50			606	534						
		60			484	411						
		65			362	323						
		75			247	190						
		80			151	102						
	E30	50					449	406	358	302		
		60					373	333	293	248		
		65					306	271	234	190		
		75					244	214	177	125		
		80					190	162	137	113		
JPF7A	E20	50	1054	945	859	703						
		60	854	755	633	510						
		65	664	589	430	305						
		75	469	365	221	102						
		80	253	156								
	E25	50			716	635	560	482				
		60			586	505	430	352				
		65			456	379	313	240				
		75			331	260	201	143				
		90			221	161	112					
	E30	65					478	411	371	310		
		75					383	341	306	262		
		80					318	281	247	215		
		90					255	226	195	157		
		95					203	177	148	116		

Dimensional Drawings

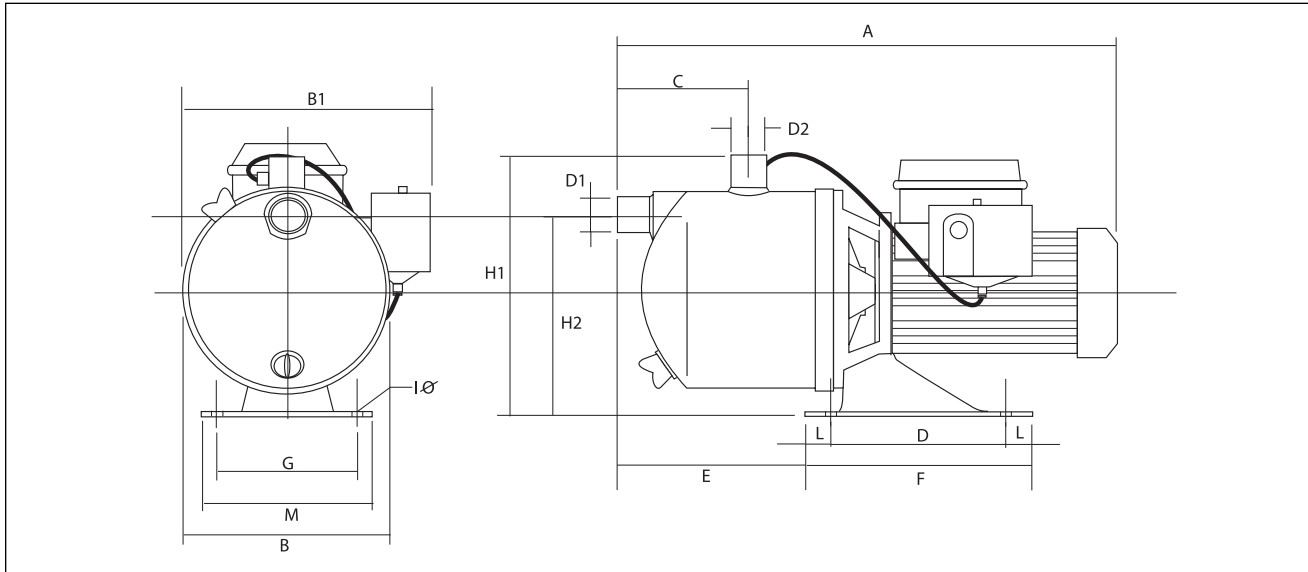

Dimensions and Weights

Pump Type	Motor Data				D1 Suction NPT	D2 Disch. NPT	Dimensions (inches)												Ship Wt. (lbs)	Ship Vol. (Cu Ft.)
	HP	S.F.	PH	Volts			A	B	B1	C	E	F	G	H1	H2	L	IØ			
JPS2A	1/2	1.5	1	115 or 230	1"	1"	14.8	7.5	9.3	3.7	4.8	7.1	4.3	9.1	7.0	0.83	0.42	24	1.5	
JPS4A	1	1.36	1	115 or 230	1"	1"	15.6	7.5	9.3	3.7	4.8	7.1	4.3	9.1	7.0	0.83	0.42	31	1.5	

Shallow Well Performance Chart

Model	HP	Depth to Water	Discharge Pressure (PSI)							Shut-off (PSI)	Pressure Switch Settings (PSI)
			20	30	35	40	45	50	55		
			Capacities (GPM)*								
JPS2A	1/2	5	15	13	11	8	6	4	2	62	30-50
		10	14	12	10	7	5	3	1	59.5	
		15	13	11	9	6	4	2		57	
		20	10	10	8	5	3	1		54.5	
		25	8	8	7	4	2			52	
JPS4A	1	5	30	27	22	17	14	10	7	68	30-50
		10	26	23	21	16	13	9	6	65.5	
		15	22	21	20	15	12	8	5	63	
		20	18	17	16	14	11	7	4	60.5	
		25	14	13	13	12	11	6	3	58	

