


FIRE FIGHTING SYSTEM



Head : Upto 105 m
Flow : Upto 273 m³/hr
Power : Upto 150 kW
Speed : 1450 & 2900 rpm
Outlet size : Upto 150 mm

HYDRO PNEUMATIC PRESSURE BOOSTING SYSTEM

MHBS & MVHS SERIES

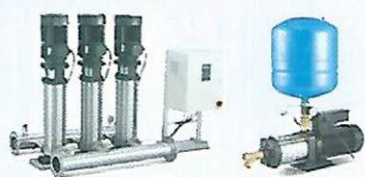

Power : MHBS Upto 2.2 kW
MVHS Upto 110 kW
Flow : No. of pumps x Discharge of individual pumps (Max)
Head : MHBS Upto 57 m
MVHS Upto 320 m
Max. Temp. : 90°C
Speed : 2900 rpm
Outlet size : Upto 100 mm
Max. Flow : MHBS : 28 m³/h
MVHS : 1200 m³/h

WELL POINT DEWATERING PUMP

WD SERIES



Power : Upto 93 kW
Flow : Upto 1280 m³/h
Head : Upto 59 m
Speed : 650 - 2900 rpm
Max. Solid Size : Upto 76 mm
Outlet Size : Upto 300 mm

INDUCTION MOTORS



Power : Upto 2.2 kW - 1 Phase
Upto 315 kW - 3 Phase
Speed : 720 - 2900 rpm
Mounting Type : Foot, Face, Flange & Foot cum Flange
IEC efficiency Class : IE2 / IE3
Motor body : Aluminium : to 9.3kW / CI : 11 to 315 kW
Connection : CSCR (Single Phase), DOL/ SD (Three Phase)
Ingress Protection : IP 55
Class of Insulation : F
IEC Efficiency Class : IE2 / IE3

MINI SEWAGE & DRAINAGE PUMPS

MS & MP SERIES



Flow : Upto 12 m³/h
Head : Upto 10.5 m
Power : Upto 1.1 kW
Speed : 2900 rpm
Solid size : Upto 25 mm
Outlet size : Upto 40 mm

SEWAGE SUBMERSIBLE PUMPS


SL, SLC & SLS SERIES



Flow : Upto 43.2 m³/h
Head : Upto 18.1 m
Power : Upto 2.2 kW
Speed : 2900 rpm
Solid Size : Upto 25 mm
Outlet Size : Upto 65 mm

LIGHT WASTE WATER PUMPS

DL, DLS, DM & DMS SERIES



Flow : Upto 180 m³/h
Head : Upto 56 m
Power : Upto 15 kW
Speed : 2900 rpm
Solid size : Upto 19 mm
Outlet size : Upto 150 mm

MEDIUM SEWAGE AND DRAINAGE PUMPS

SM, SH & DM - SERIES



Flow : Upto 780 m³/h
Head : Upto 62 m
Power : Upto 37 kW
Speed : 1450 & 2900 rpm
Solid size : Upto 55 mm
Outlet size : Upto 250 mm

SEWAGE SUBMERSIBLE PUMPS

GA & GB SERIES - VORTEX IMPELLER



Flow : Upto 216 m³/h
Head : Upto 65 m
Power : Upto 50 kW
Speed : 1450 & 2900 rpm
Solid Size : Upto 90 mm
Outlet Size : Upto 100 mm