

FS 100
FS 150
FS 250
FS 400




FS 150



Italian dual mechanical seal. With thermal protection device and 316 SS shaft. Stainless steel 304 pump body. Non-metal parts are made of PPS material. Small power, big capacity, energy saving. Suitable for the circulating of seawater in the fish reserve of restaurant, villa and factory, also can be used for mariculture.

* FS550 FS750 with cast iron base

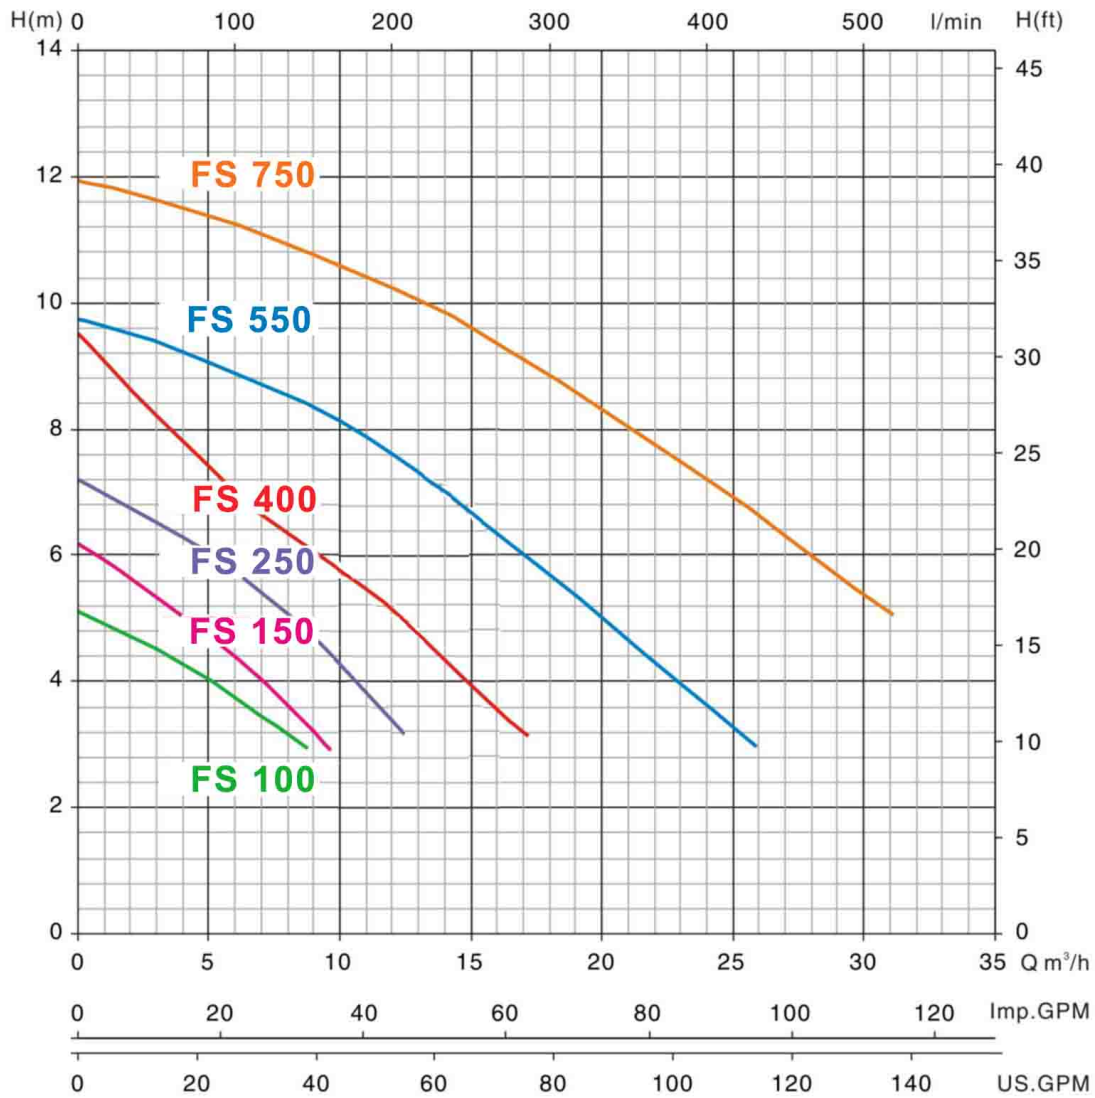

MODEL (50Hz)	POWER		VOLTAGE	rotation	MAX FLOW	MAX HEAD	OUTLET
	W	HP	V	rpm	m³/H	m	mm
FS 100	100	1/8	220/240	2850	10	5.0	40/50
FS 150	150	1/5	220/240	2850	15	5.5	40/50
FS 250	250	1/3	220/240	2850	18	6.5	40/50
FS 400	400	1/2	220/240	2850	22	9.2	40/50
FS 550*	550	0.75	220/240	2850	26	8.4	40/50
FS 750*	750	1	220/240	2850	35	12.5	40/50