

ROTOR

CENTRIFUGAL PUMP

W系列离心泵

使用环境


液体温度不超过60℃
环境温度不超过40℃

OPERATING LIMIT

Fluid temperature up to +60℃
Maximum ambient temperature +40℃

W series Centrifugal pump are designed to achieve high delivery rate with under continuous or heavy duty with average head.They advantageous for rain and gravity irrigation ,for pumping water from lakes , rivers , wells and for a wide of industrial uses

Performance chart at n=2850r/min

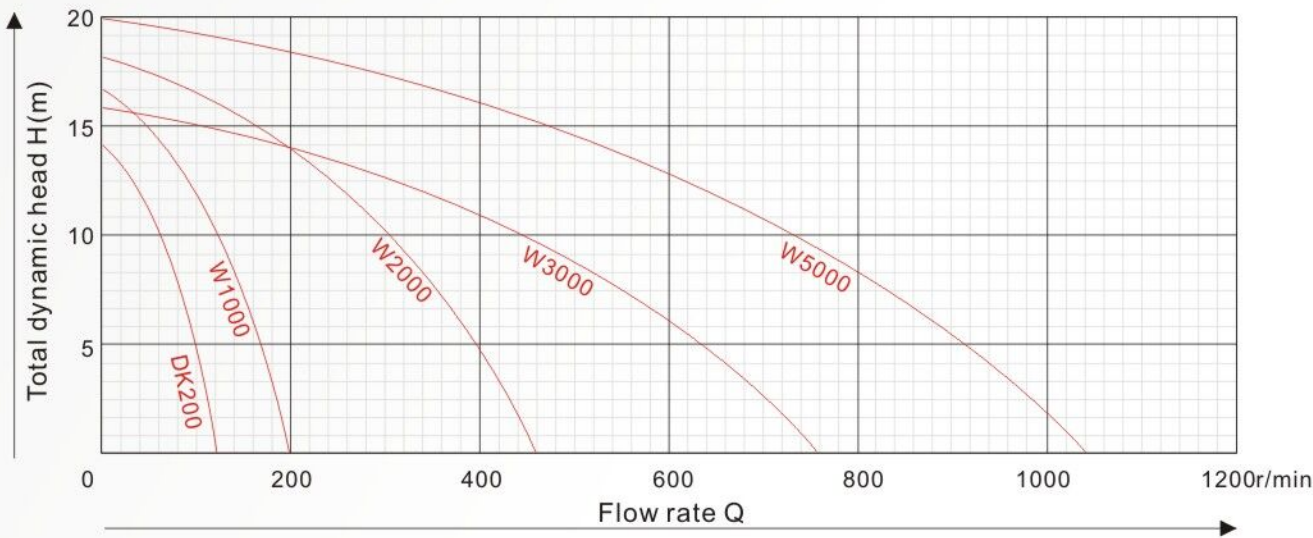

Performance Data

TYPE	POWER KW		R.P.M.	PIPE DIA	Q.MAX (L/MIN)	H.MAX (M)	LXWXH(MM)
DK200	0.37KW	0.5HP	2850RPM	1"X1"	110L/MIN	14M	310x170x230
W1000	0.75KW	1HP	2850RPM	1.5"X1.5"	200L/MIN	17M	330x180x220
W2000	1.5KW	2HP	2850RPM	2"X2"	460L/MIN	18M	440x280x275
W3000	2.2KW	3HP	2850RPM	3"X3"	760L/MIN	16M	375x225x275
W5000	4KW	5HP	2850RPM	4"X4"	1200L/MIN	20M	530x330x270