




www.pumps.com.tw



BAH

High Head 2 stages
Submersible pump
Non-clogging





Liquid temperature: 0 °C to 40°C/+32 °F to +104°F
HP range: 1/2 to 1HP / 400W to 750W
pH: 6 to 8
Protection class: IP68
Maximum immersion depth: 6M
Pass Solid: 8mm

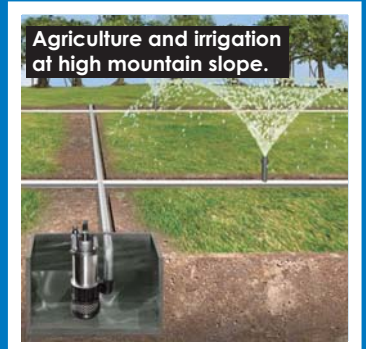


HUNG PUMP GROUP

High Pressure Pumps

Dimension					
Model	A	B	C	D	E
	mm	mm	mm	mm	mm
BAH-400	370	151	227	220	151
BAH-750	390	170	240	233	170

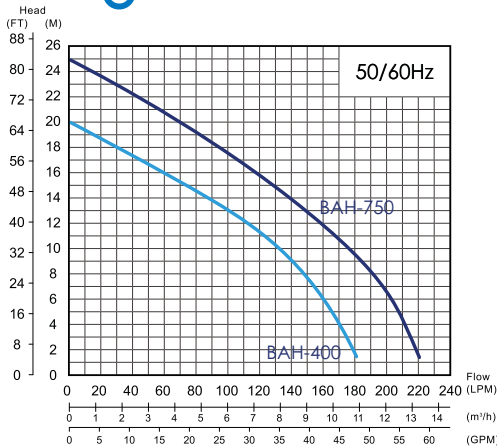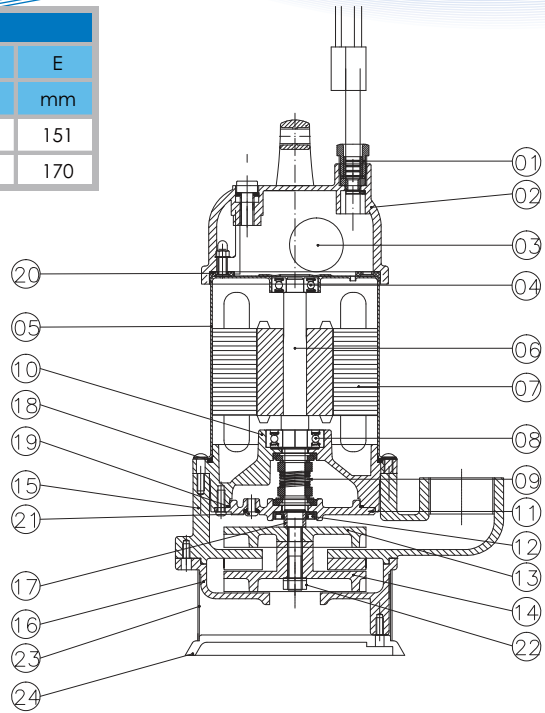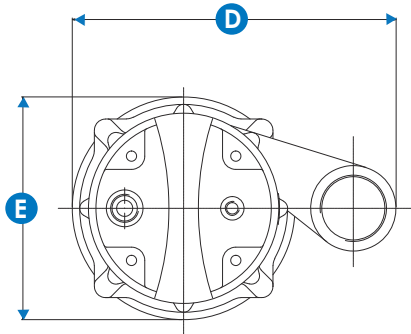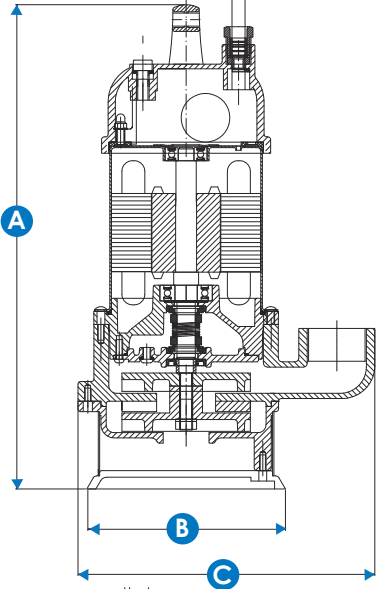

Construction					
No.	Description	Material	No.	Description	Material
1	Power Cord		13	Upper Impeller	FC200
2	Top Cover	PA+GF	14	Lower Impeller	FC200
3	Capacitor		15	Upper Pump Casing	FC200
4	Upper Bearing		16	Lower Pump Casing	FC200
5	Motor Housing	SUS304	17	Sleeve	SUS304
6	Shaft / Rotor	SUS410	18	O-ring	NBR
7	Stator / Coil	C60	19	O-ring	NBR
8	Lower Bearing		20	Packing	NBR
9	Double Mech. Seal	CA/CE	21	Screw	SUS304
10	Seal Plate	FC200	22	Nut	SUS304
11	Oil Seal Cover	FC200	23	Strainer	SUS304
12	Oil Seal	NBR	24	Base	FC200



Specification													
Model No.	Power		Outlet		Max Flow (LPM)	LPM Flow @ Head					Max Head(M)	Dimension L x W x H(mm)	Weight Kg
	HP	W	mm	inch		3M	6M	9M	12M	15M			
BAH-400	1/2	400	32	1-1/4"	180	175	160	140	115	75	20	227 X 151 X 370	13
BAH-750	1	750	40	1-1/2"	220	215	200	185	160	130	25	240 X 170 X 390	15